


# B396005

# 25471

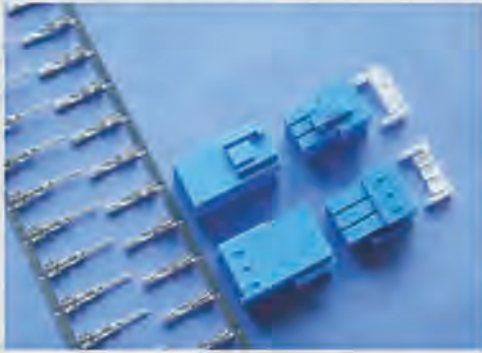

- ▶ 主要技术特性 (Main Specifications)
- ▶ 适用导线规格 (Applicable wire) : AWG26#~18#
- ▶ 适用基板厚度 (Applicable PC board thickness) : —
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 7A AC, DC
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1500V AC/minute

### 材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.25mm	镀锡 Tin-plated


### 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 

### TERMINAL


B396005-3

25471-A

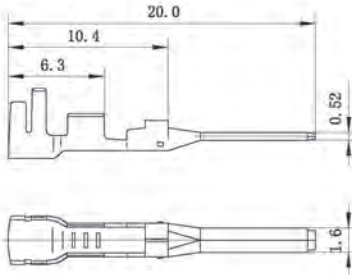

B396005-4

25471-Y



### HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)
6	B396005-1-06    25471-6R 	B396005-2-06    25471-6P 
8	B396005-1-08    25471-8R 	B396005-2-08    25471-8P 

# B396005

# 25471

## HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)	锁扣胶座 Female Housing (for socket contact)
9	<b>B396005-1-09</b> <b>25471-9R</b>	<b>B396005-2-09</b> <b>25471-9P</b>	<b>B396005-5-03</b> <b>25471-3S</b>